

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organizations to transform processes & reduce costs.

Our SlimLine range of antennas are unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form.

Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.


Times-7 Research Ltd
29 Railway Avenue
Lower Hutt 5010
New Zealand

NEW ZEALAND
P: +64 4 974 6566

USA/CANADA
P: +1 408 769 5025

E: info@times-7.com

www.times-7.com



The SlimLine A6031

Up to 4 m / 13 ft. read range

Just 12 mm / 0.5 in. thick

Sleek & rugged design, with customer friendly aesthetics

Typical applications:
Retail, office, industry / any space constrained or customer facing environment

Part of the SlimLine range of multi-purpose antennas, the A6031 is an ultra-low profile circular polarized flat panel antenna for UHF RFID applications in customer facing or space conscious environments.

With a 4 m / 13 ft. read range, the A6031 is similar in size and weight to a Tablet PC and can easily blend into any office or retail environment.

Order Information

(please quote both product code & part no.)

Product Code	Band	Part No.
A6031	ETSI 865-868 MHz	70804
A6031	FCC 902-928 MHz	70810
Cable Accessories	Cable Type	Part No.
Cable 2 m, SMA to RPTNC	LMR 195 / 240 / 400	71436 / 71782 / 72042
Cable 4 m, SMA to RPTNC	LMR 240 / 400	71784 / 72043
Cable 6 m, SMA to RPTNC	LMR 240 / 400	71904 / 72044
Cable 8 m, SMA to RPTNC	LMR 240 / 400	71788 / 72045

Specifications


Physical / Environmental Specifications

Dimensions (L x W x D):	275 mm x 214 mm x 12 mm 10.8 " x 8.5 " x 0.5 "
Weight:	0.6 kg / 1.3 lbs.
Radome Material:	Fire retardant ABS
Environmental Rating:	IP65
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F
Mounting:	Integrated mounting holes / Universal mounting brackets for rack (VESA) mounting available
Connector type / position:	SMA female side fly lead (300 mm / 1 ft.)
Vibration:	IEC 68-2-6 (10 to 150 Hz, 0.5g, 1 hr. / 2 axes, Random Vibration)
Humidity:	IEC 68-2-30 (+25° to +55°C / +77° to +131°F / 24 hr. cycle of at least 90% relative humidity)
Cold Test:	IEC 68-2-1 (-40°C / -40°F / 24 hr.)
Heat Test:	IEC 68-2-2 (+70°C / +158°F / 24 hr.)
Temperature Shock Test:	IEC 68-2-1 (10 cycles of 30 mins. at -40°C / -40°F followed by 30 mins. at +70°C / +158°F and back)


Electrical Specifications

Frequency Range:	865-868 MHz / 902-928 MHz
Polarization:	RHCP (Right Hand Circular Polarized)
Far-field Gain:	4 dBiC typical
Far-field 3dB beamwidth:	80° in both planes
VSWR	1.4 typical
Front to back ratio:	-18 dB
Axial ratio:	2 dB at boresight
Nominal Impedance:	50 Ω
Anti-static protection:	DC Grounded
Antenna Detection	10K Ω resistance
Maximum Input Power:	3 W

E-field Radiation Patterns

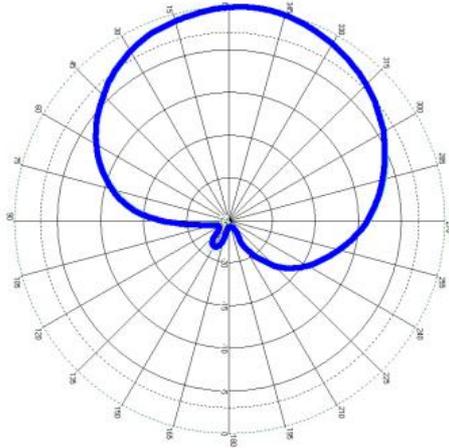

Vertical

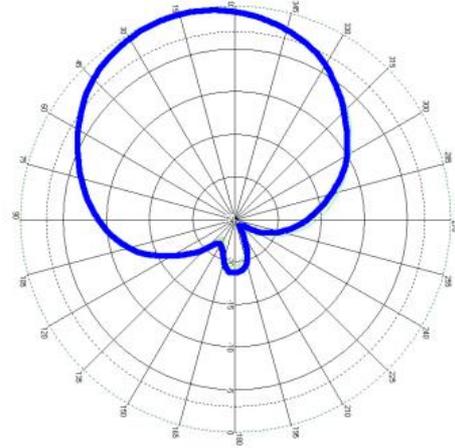

Horizontal

Applications



Retail inventory management



Office asset tracking



Any space constrained /
customer facing environment

OUR GLOBAL NETWORK

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

Times-7 Research Ltd
29 Railway Avenue
Lower Hutt 5010
New Zealand

NEW ZEALAND
P: +64 4 974 6566

USA/CANADA
P: +1 408 769 5025

E: info@times-7.com

www.times-7.com

The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.